
Ordering Information

INCANDESCENT/LOW VOLTAGE DIMMERS				
Model No.	**PDQ4-1920/LV**	**PDQ4-2500/LV**	**PDQ4-3750/LV**	**PDQ4-5000/LV**
Capacity	1920 watts	2500 watts	3750 watts	5000 watts
Input (by others)	20 amps	30 amps	40 amps	50 amps
Branch Breakers	None	2-20 amp	3-20 amp	4-20 amp
Max. Heat Loss	*– All dimmers have a heat loss of 2% of connected load -*			
Weight	23 lbs	23 lbs.	23 lbs.	23 lbs.
Cabinet Height	18" High	32" High	32"High	32"High
	- All Cabinets are 8.375" Wide and 10" deep -			

CONTROL PANELS			
Model No.	**PRE-1**	**PRE-4**	**PRE-4M**
No. Presets Selects	1	4	4 + MAX.
No. of LED indicators	1	4	5
Off Switch	Yes	Yes	Yes
Take/Control	*– Last action takes precedence –*		
Finish*	*º Standard – Natural Color Grain Sanded Aluminum –*		
No. of #18 wires	5	11	12

*Finish: If no finish is listed, the panel will be supplied with NATURAL COLOR GRAIN SANDED ANODIZED ALU MINUM.
For Deluxe finish with screwless appearance, add color code to the end of the Control Panel Model Number.

AL Brushed Aluminum **OW** Oyster White **PB** Polished Brass
PR Prime Coat Only **BK** Brushed Black **BB** Brushed Medium Bronze

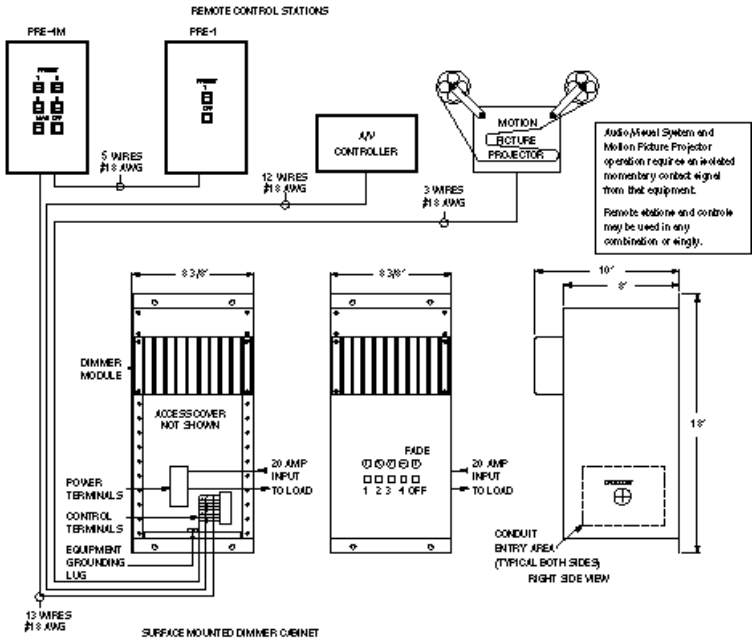

LEVITON SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Mfg. Co., Inc.
P.O. Box 2210 • Tualatin, Oregon 97062 • Phone: (503)404-5500 • Fax: (503) 404-5600

LEVITON LIGHTING CONTROL DIVISION
Building a Connected World

G-6445M/J2/eg